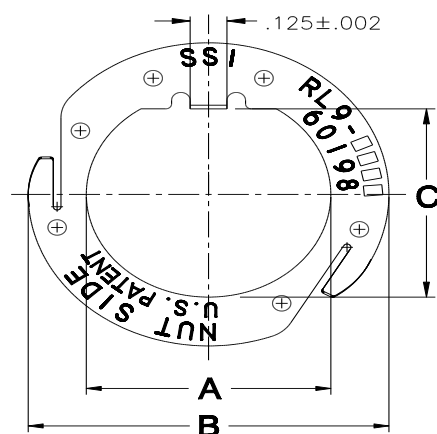


FOR MIL-C-83723 SERIES III CONNECTORS
BOTH BAYONET & THREADED
MIL-C-26500 (MS24265) CONNECTORS
TAB "D" SLOT KEYING

PART NUMBER	A +/- .005	B +/- .005	C +/- .005	D	SHELL SIZE
RL9-K004	0.630	1.00	0.604	0.795-0.829	8
RL9-N005	0.755	1.13	0.729	0.920-0.954	10
RL9-P001	0.942	1.32	0.916	1.106-1.140	12
RL9-R008	1.005	1.38	0.979	1.171-1.205	14
RL9-S003	1.130	1.5	1.104	1.295-1.329	16
RL9-T003	1.255	1.63	1.224	1.421-1.455	18
RL9-Z008	1.380	1.75	1.349	1.545-1.579	20
RL9-Z009	1.505	1.88	1.474	1.679-1.705	22
RL9-Z010	1.630	2.00	1.599	1.795-1.829	24

BASE MATERIAL: STAINLESS STEEL 17-7, Rockwell Hardness Rc 43 min. Finish Options listed below.

FINISH	SUFFIX	STC SPECIFICATION
ZINC	-Z	QQ-Z-325, CLASS 2, TYPE II
ELECTROLESS NICKEL	-E	MIL-C-26074, CLASS 1, GRADE A

Saint Technologies, Inc. 10 North Locust P.O. Box 66 Shannon, IL 61078 Phone: 815.864.3035 Fax: 815.864.3134 CAGE 60198	TITLE: REALLOCK™, FOR D38999/24 CONNECTORS & TAB "D" SLOT KEYING	CHART NUMBER
		2009
		REV. C 02/01/2001 ECO S005

THIS DRAWING AND INFORMATION HEREIN IS THE EXCLUSIVE PROPERTY OF SAINT TECHNOLOGIES, INC. AND UNAUTHORIZED USE OR REPRODUCTION THEREOF IS PROHIBITED.