


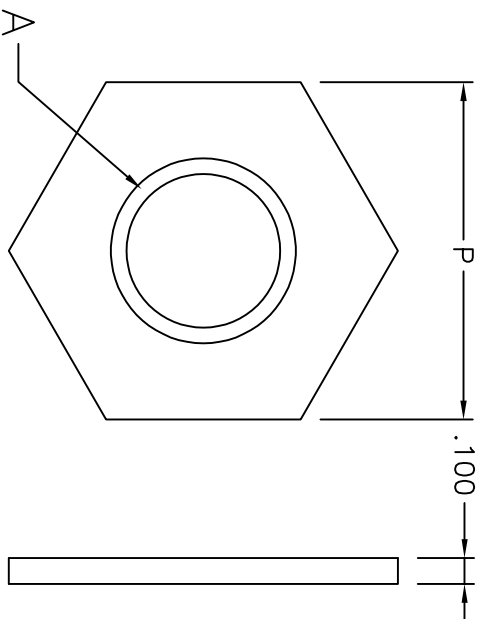

NOTES:
1. MAX. RADIUS ON NUT POINTS IS 0.010 INCHES

GLENAIR SERIES 801 CONNECTORS					
PART NUMBER	"P" DIM	"A" DIM	SHELL SIZE	MATERIAL	USED WITH STI #
NRL-6010	0.490	0.375-28 2B	5	ALUMINUM	RL9-G010
NRL-6110	0.490	0.375-28 2B	5	STAINLESS	RL9-G010
NRL-6010-PTFE	0.490	0.375-28 2B	5	ALUMINUM	RL9-G010
				FINISH: AMS 2454 TYPE V, SC4, GRADE1B	
MATERIAL	FINISH				
6061-T6 ALUMINUM	OLIVE DRAB CADMIUM PLATING PER AMS-QQ-P-416 TYPE 2 CLASS 3 OVER ELECTROLESS NICKEL PER ASTM-B733 TYPE1 SCO CLASS 1				
303 STAINLESS	STAINLESS STEEL PER ASTM A582 PASSIVATED PER ASTM A967 AND/OR AMS 2700				

This drawing and information herein is the exclusive property of Saint Technologies, Inc. and unauthorized use or reproduction thereof is prohibited.

B	ECO 20220912	9/12/22	JFB
REV. LTR.	REVISION	DATE	APPROVED

Unless Otherwise Specified;

Dimensions Are In Inches

TOLERANCE ON:

One Place (.0)
Two Places (.00)
Three Places (.000)
Angles ± 4°

TITLE REALLOCK™ NUTS FOR USE WITH CHART 2024

SAINT TECHNOLOGIES, INC.
MFG. CASE CODE 60198
Shannon, IL 61078

DRAWN	JFB	6/21/18
CHECKED	JFB	6/21/18
APPROVED	JFB	6/21/18

CHART N6000
DRAWING NUMBER