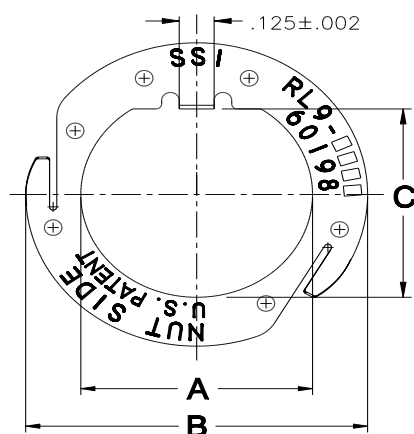


TYPICAL INSTALLATION

FOR MIL-C-26482 SERIES 2 CONNECTORS TAB "D" SLOT KEYING

PART NUMBER	A +/- .005	B +/- .005	C +/- .005	D	SHELL SIZE
RL9-L001	0.567	0.94	0.535	0.733-0.767	8
RL9-M004	0.692	1.07	0.660	0.858-0.892	10
RL9-M005	0.880	1.25	0.823	1.045-1.079	12
RL9-R007	1.005	1.38	0.947	1.171-1.205	14
RL9-S002	1.130	1.50	1.071	1.295-1.329	16
RL9-T002	1.255	1.63	1.196	1.421-1.455	18
RL9-Z005	1.380	1.75	1.321	1.545-1.579	20
RL9-Z006	1.505	1.88	1.446	1.671-1.705	22
RL9-Z007	1.630	2.00	1.571	1.795-1.829	24

BASE MATERIAL: STAINLESS STEEL 17-7, Rockwell Hardness Rc 43 min. Finish Options listed below.

FINISH	SUFFIX	STC SPECIFICATION
ZINC	-Z	QQ-Z-325, CLASS 2, TYPE II
ELECTROLESS NICKEL	-E	MIL-C-26074, CLASS 1, GRADE A

Saint Technologies, Inc. 10 North Locust P.O. Box 66 Shannon, IL 61078 Phone: 815.864.3035 Fax: 815.864.3134 CAGE 60198	TITLE: REALLOCK™, FOR MIL-C-26482 SERIES 2 CONNECTORS & TAB "D" SLOT KEYING	CHART NUMBER
		2008
		REV. B 02/01/2001 ECO S005

THIS DRAWING AND INFORMATION HEREIN IS THE EXCLUSIVE PROPERTY OF SAINT TECHNOLOGIES, INC. AND UNAUTHORIZED USE OR REPRODUCTION THEREOF IS PROHIBITED.