


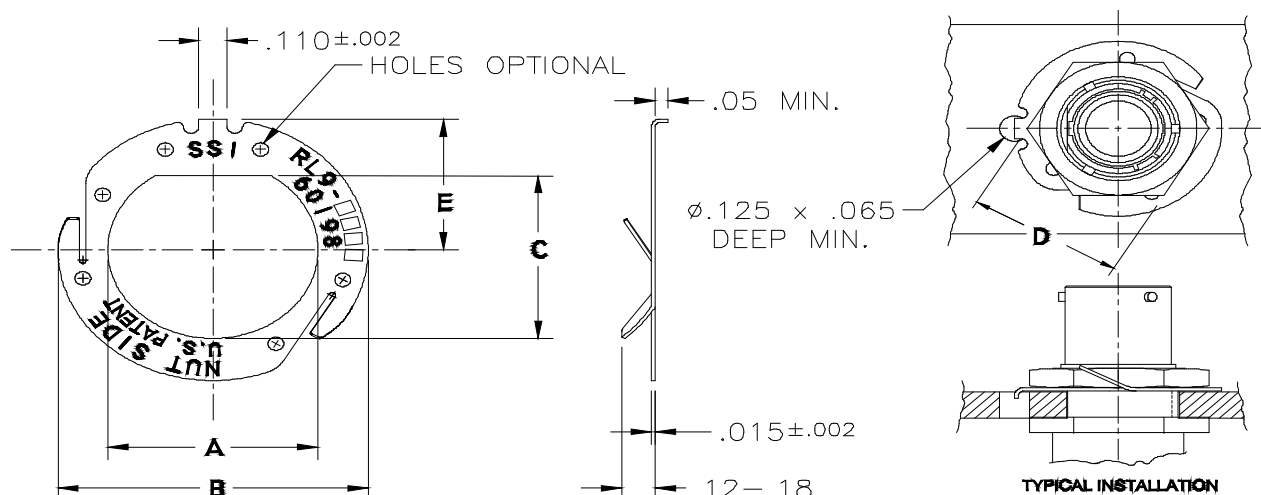

FOR D38999/24 CONNECTORS “D” SLOT & EXTERNAL KEYING

PART NUMBER	A +/- .005	B +/- .015	C +/- .005	D	E +/- .005	SHELL SIZE	WEIGHT LBS.
RL9-N007-PTFE	0.674	1.12	0.656	0.859-0.945	0.560	9	0.007
RL9-N008-PTFE	0.792	1.24	0.756	0.984-1.063	0.620	12	0.003
RL9-R010-PTFE	0.989	1.43	0.943	1.172-1.260	0.715	13	0.003
RL9-S004-PTFE	1.107	1.59	1.067	1.296-1.417	0.795	15	0.004
RL9-T005-PTFE	1.265	1.63	1.192	1.422-1.457	0.815	17	0.003
RL9-Z022-PTFE	1.383	1.79	1.317	1.545-1.614	0.895	19	0.004
RL9-Z023-PTFE	1.501	1.98	1.443	1.672-1.811	0.990	21	0.005
RL9-Z024-PTFE	1.619	2.14	1.567	1.796-1.969	1.070	23	0.006
RL9-Z025-PTFE	1.737	2.19	1.693	1.939-2.017	1.095	25	0.005

BASE MATERIAL: STAINLESS STEEL 17-7, Rockwell Hardness Rc 43 min. Finish Options listed below.

FINISH
NICKEL FLUORCARBON
POLYMER

SUFFIX
-PTFE

STC SPECIFICATION
AMS 2454, TYPE V, SC4, GRADE 1B

Saint Technologies, Inc. 10 North Locust P.O. Box 66 Shannon, IL 61078 Phone: 815.864.3035 Fax: 815.864.3134 CAGE 60198	TITLE: REALLOCK™, FOR D38999/24 CONNECTORS, “D” SLOT & EXTER- NAL KEYING	CHART NUMBER
		2011-PTFE
		REV. A 09/07/2022

THIS DRAWING AND INFORMATION HEREIN IS THE EXCLUSIVE PROPERTY OF SAINT TECHNOLOGIES, INC. AND UNAUTHORIZED USE OR REPRODUCTION THEREOF IS PROHIBITED.