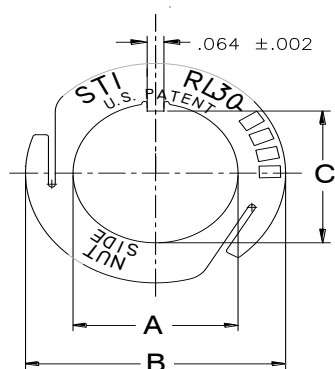


TYPICAL INSTALLATION

## FOR MS-21340 NUTS INTERNAL KEYING-0.031 inches thick

| PART NUMBER | A<br>+/- .005 | B<br>+/- .005 | C<br>+/- .005 | D<br>+/- .005 | NUT SIZE           | WEIGHT LBS. |
|-------------|---------------|---------------|---------------|---------------|--------------------|-------------|
| RL30-G111   | 0.380         | .735          | .346          | 0.560         | 3/8"               | 0.001       |
| RL30-H111   | 0.471         | 0.826         | 0.437         | 0.625         | 15/32"             | 0.001       |
| RL30-J111   | 0.441         | 0.826         | 0.407         | 0.625         | 7/16"              | 0.001       |
| RL30-K111   | 0.505         | 0.826         | 0.471         | 0.625         | 1/2"               | 0.001       |
| RL30-M111   | 0.630         | 0.993         | 0.596         | 0.812         | 5/8"               | 0.001       |
| RL30-N111   | 0.755         | 1.112         | 0.717         | 0.938         | 3/4"               | 0.002       |
| RL30-P111   | 0.880         | 1.320         | 0.846         | 1.062         | 7/8"<br>MS3186 NUT | 0.003       |
| RL30-R111   | 1.010         | 1.481         | 0.958         | 1.312         | 1.0"               | 0.003       |

BASE MATERIAL: STAINLESS STEEL 17-7, Rockwell Hardness Rc 43 min. Finish Options listed below.

| FINISH             | SUFFIX | STC SPECIFICATION             |
|--------------------|--------|-------------------------------|
| ZINC               | -Z     | QQ-Z-325, CLASS 2, TYPE II    |
| ELECTROLESS NICKEL | -E     | MIL-C-26074, CLASS 1, GRADE A |

|                                                                                                                                                   |                                                                                             |                |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------|
| <b>Saint Technologies, Inc.</b><br>10 North Locust P.O. Box 66<br>Shannon, IL 61078<br><br>Phone: 815.864.3035<br>Fax: 815.864.3134<br>CAGE 60198 | TITLE:                                                                                      | CHART NUMBER   |
|                                                                                                                                                   | REALLOCK™, FOR MS-21340<br>NUTS WITH INTERNAL KEYING<br>MATERIAL THICKNESS: 0.031<br>INCHES | 2025           |
|                                                                                                                                                   |                                                                                             | REV. 05/9/2006 |