


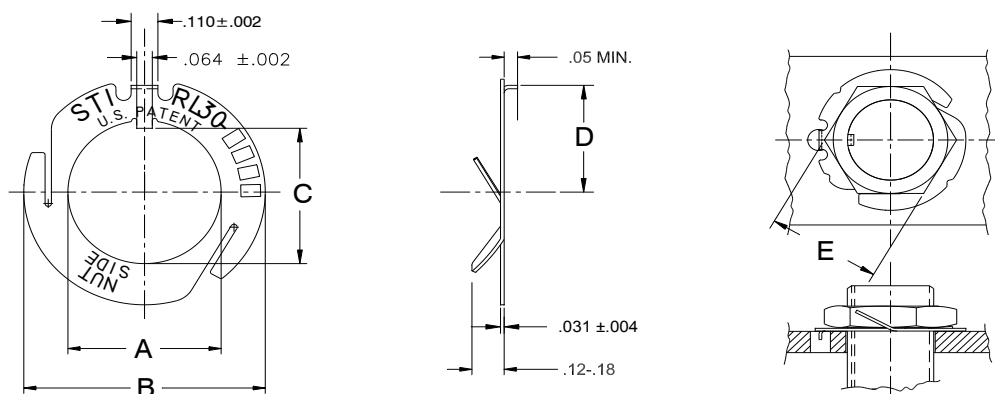

FOR MS21340 NUTS INT. & EXT. KEYING-0.031 inches thick

PART NUMBER	A +/- .005	B +/- .005	C +/- .005	D +/- .005	E +/- .005	NUT SIZE	WEIGHT LBS.
RL30-G131	0.380	.735	.346	.345	0.560	3/8"	0.001
RL30-H131	0.471	0.826	0.437	0.392	0.625	15/32"	0.001
RL30-J131	0.441	0.826	0.407	0.392	0.625	7/16"	0.001
RL30-K131	0.505	0.826	0.471	0.408	0.625	1/2"	0.001
RL30-M131	0.630	0.993	0.596	0.470	0.812	5/8"	0.001
RL30-N131	0.755	1.112	0.717	0.528	0.938	3/4"	0.002
RL30-P131	0.880	1.320	0.846	0.595	1.062	7/8" MS3186 NUT	0.003
RL30-R131	1.010	1.481	0.958	0.705	1.312	1.0"	0.003

BASE MATERIAL: STAINLESS STEEL 17-7, Rockwell Hardness Rc 43 min. Finish Options listed below.

FINISH	SUFFIX	STC SPECIFICATION
ZINC	-Z	QQ-Z-325, CLASS 2, TYPE II
ELECTROLESS NICKEL	-E	MIL-C-26074, CLASS 1, GRADE A

Saint Technologies, Inc. 10 North Locust P.O. Box 66 Shannon, IL 61078 Phone: 815.864.3035 Fax: 815.864.3134 CAGE 60198	TITLE:	CHART NUMBER
	REALLOCK™, FOR MS21340 NUTS WITH INTERNAL & EXTER- NAL KEYING	2027
	MATERIAL THICKNESS: 0.031 IN.	REV. 06/01/2005

THIS DRAWING AND INFORMATION HEREIN IS THE EXCLUSIVE PROPERTY OF SAINT TECHNOLOGIES, INC. AND UNAUTHORIZED USE OR REPRODUCTION THEREOF IS PROHIBITED.