


FOR LN29729 CONNECTORS

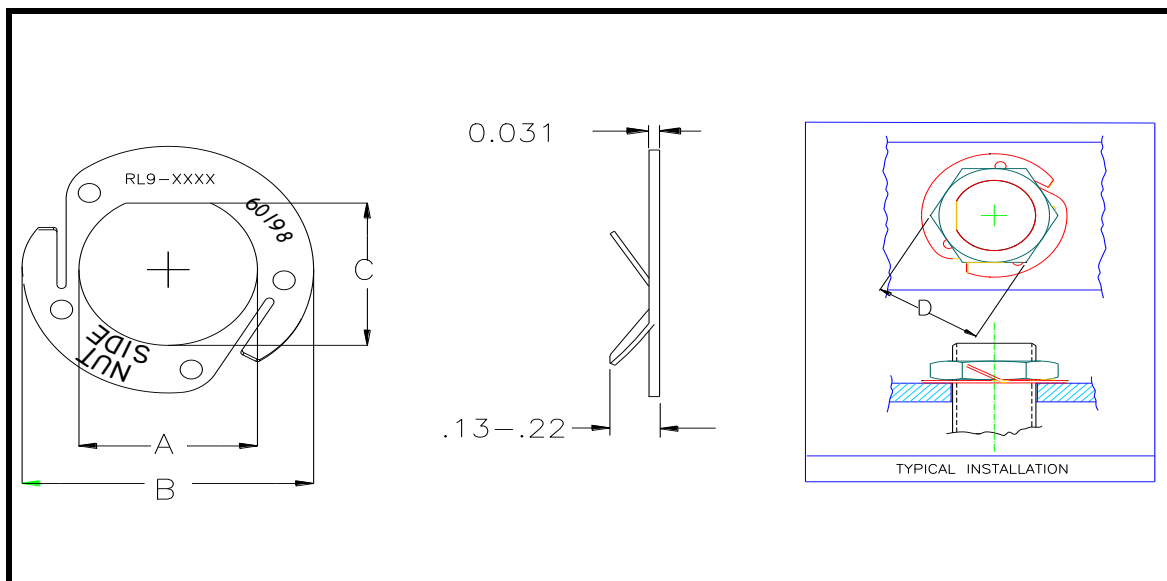

PART NUMBER	A	B	C	D		WEIGHT LBS. MAX.
	HOLE Dia (in)	OUTSIDE DIA.	D-Flat (in)	NUT FLATS	SHELL	
	+0.005/-0.005	+0.005/-0.005	+0.005/-0.005	+/-0.016	SIZE	
RL9-L003	0.581	1.031	0.543	0.752	8	0.003
RL9-M014	0.707	1.157	0.669	0.874	10	0.003
RL9-P006	0.904	1.354	0.831	1.063	12	0.003
RL9-R017	1.022	1.495	0.957	1.189	14	0.004
RL9-R018	1.144	1.690	1.079	1.311	16	0.004
RL9-T010	1.270	1.757	1.205	1.437	18	0.004
RL9-Z043	1.392	1.920	1.331	1.563	20	0.004
RL9-Z044	1.522	1.989	1.457	1.689	22	0.005
RL9-Z045	1.644	2.171	1.579	1.811	24	0.006

BASE MATERIAL: STAINLESS STEEL 17-7, Rockwell Hardness Rc 43 min. Finish Options listed below.

FINISH	SUFFIX	STC SPECIFICATION
CADMIUM	-P	QQ-P-416 , TYPE II, CLASS 2
ELECTROLESS NICKEL	-E	MIL-C-26074, CLASS 1, GRADE A

Saint Technologies, Inc. 10 North Locust P.O. Box 66 Shannon, IL 61078 Phone: 815.864.3035 Fax: 815.864.3134 CAGE 60198	TITLE: REALLOCK™ , FOR LN29729 CONNECTORS "D" SLOT KEYING CAGE: 60198	CHART NUMBER
		2022
		REV. C 02/06/2006 ECO S 0049

THIS DRAWING AND INFORMATION HEREIN IS THE EXCLUSIVE PROPERTY OF SAINT TECHNOLOGIES, INC. AND UNAUTHORIZED USE OR REPRODUCTION THEREOF IS PROHIBITED.